

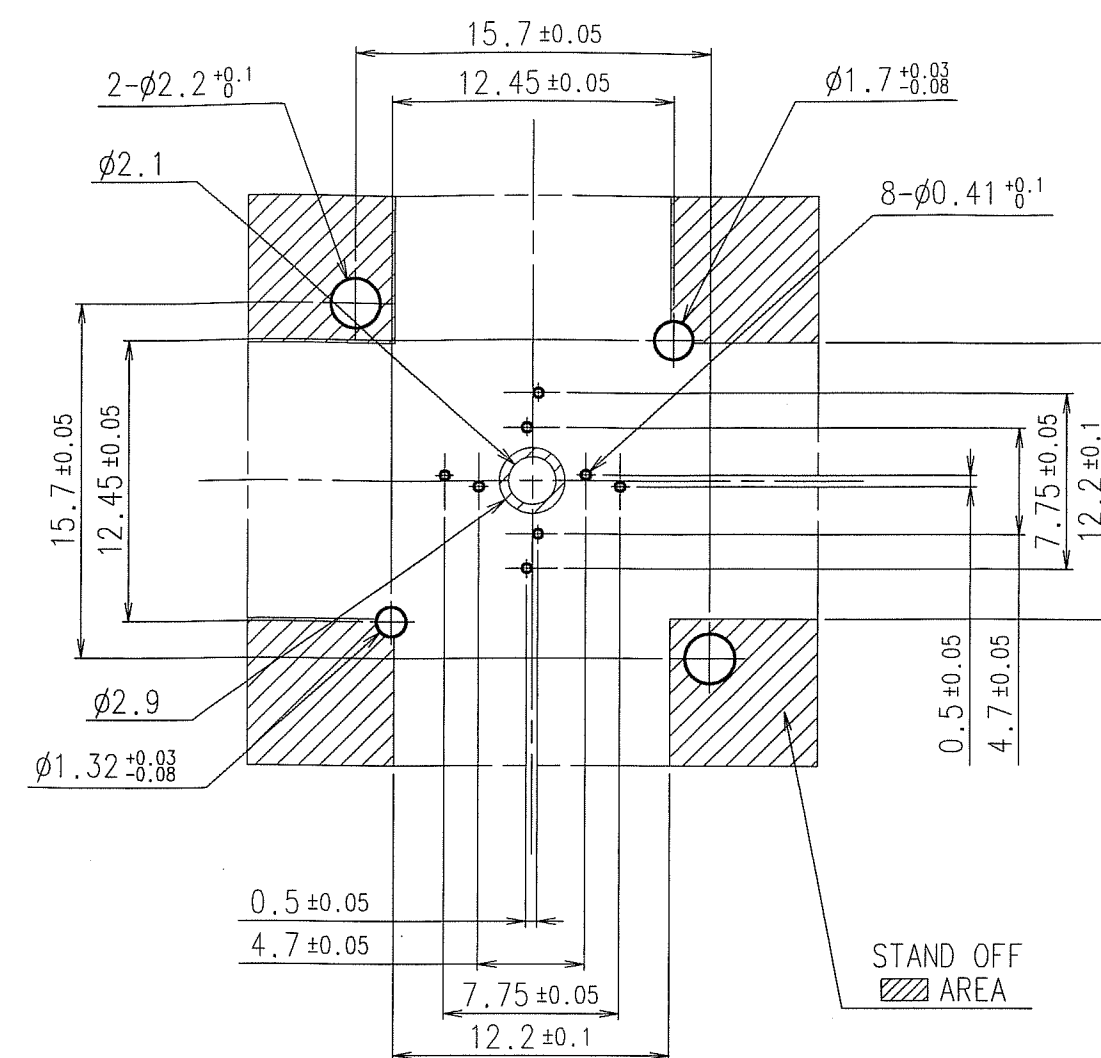


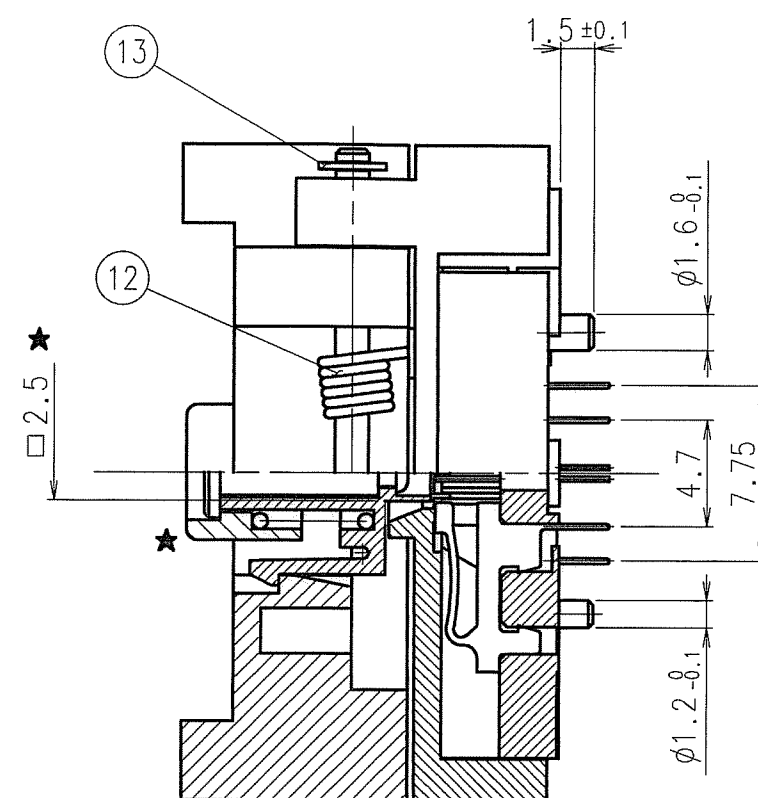

PCB PATTERN (TOP VIEW)
(S=3:1)

NOTES


- 1) MARK PIN COUNT WITH LASER MARK.
- 2) Under the any humidity involved testing, the socket MUST be fixed on the BIB with provided screws.

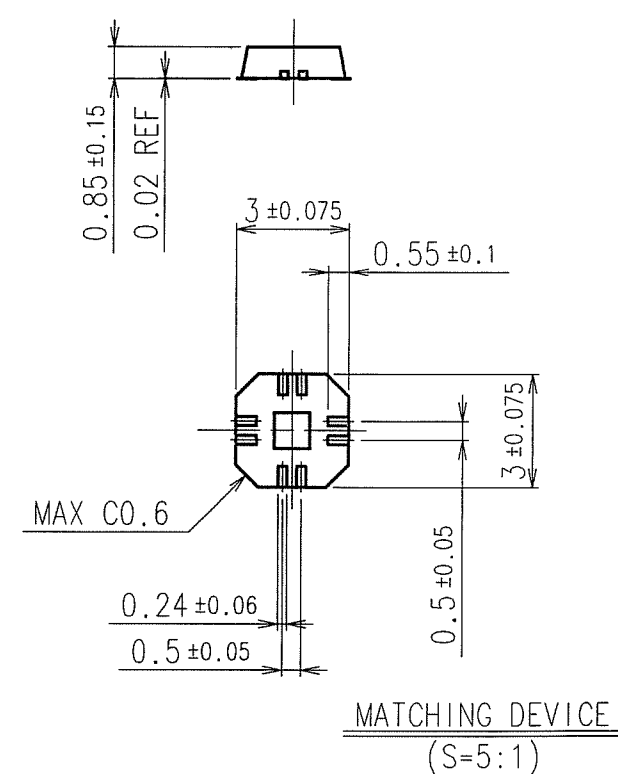

SPECIFICATION 仕様	
CONTACT RESISTANCE 接触抵抗	50mΩ or less at 10mA (INITIAL)
DIELECTRIC WITHSTANDING VOLTAGE 耐电压	500 V.A.C for 1 minute
INSULATION RESISTANCE 絶縁抵抗	1000 MΩ or more at 500V.D.C
OPERATING TEMPERATURE 使用温度	-65℃~150℃
RETENTION FORCE 端子抜け強度	0.5kg for 1 minute
INSERTION 寿命	10000 cycle (MECHANICAL)

ESP CONFIDENTIAL

						機種 USED FOR	顧客品番 CUSTOMER'S PART NO.	一般公差 GENERAL TOLERANCES	±0.3, ±10%
						承認者 APPROVED BY N.TAKAYAMA	品名 NAME QFN-8(24)B-0.5-02-00		尺度 SCALE 3:1
						検査者 CHECKED BY H.KISO	IC SOCKET		REV.NO. d
						設計者 DESIGNED BY A.MORISHITA			
△	訂正年月日 DATE	訂正箇所 REVISIONS	承認 APP.	担当 SIGN	作成年月日 ISSUED ON	図番 DRAWING NO.	55-037-034-011		
△	07.12.25	改訂図No.2発行(改訂箇所は★印7箇所)	H.S	Y.H	2004/01/15				



L	
K	
J	
I	
H	
G	
F	
E	
D	
C	
B	
A	
部門 SECTION	枚数 SHEETS