

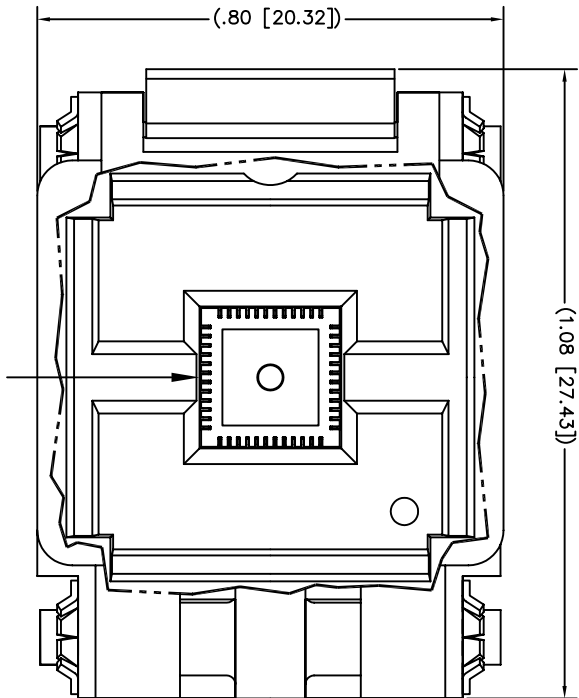


**NOTE : * DIMENSIONS OF SOCKET FEATURES SHOWN.
BOARD DESIGNER SHOULD SELECT APPROPRIATE HOLE
SIZES TO PROVIDE A SLIP FIT FOR THESE FEATURES.**

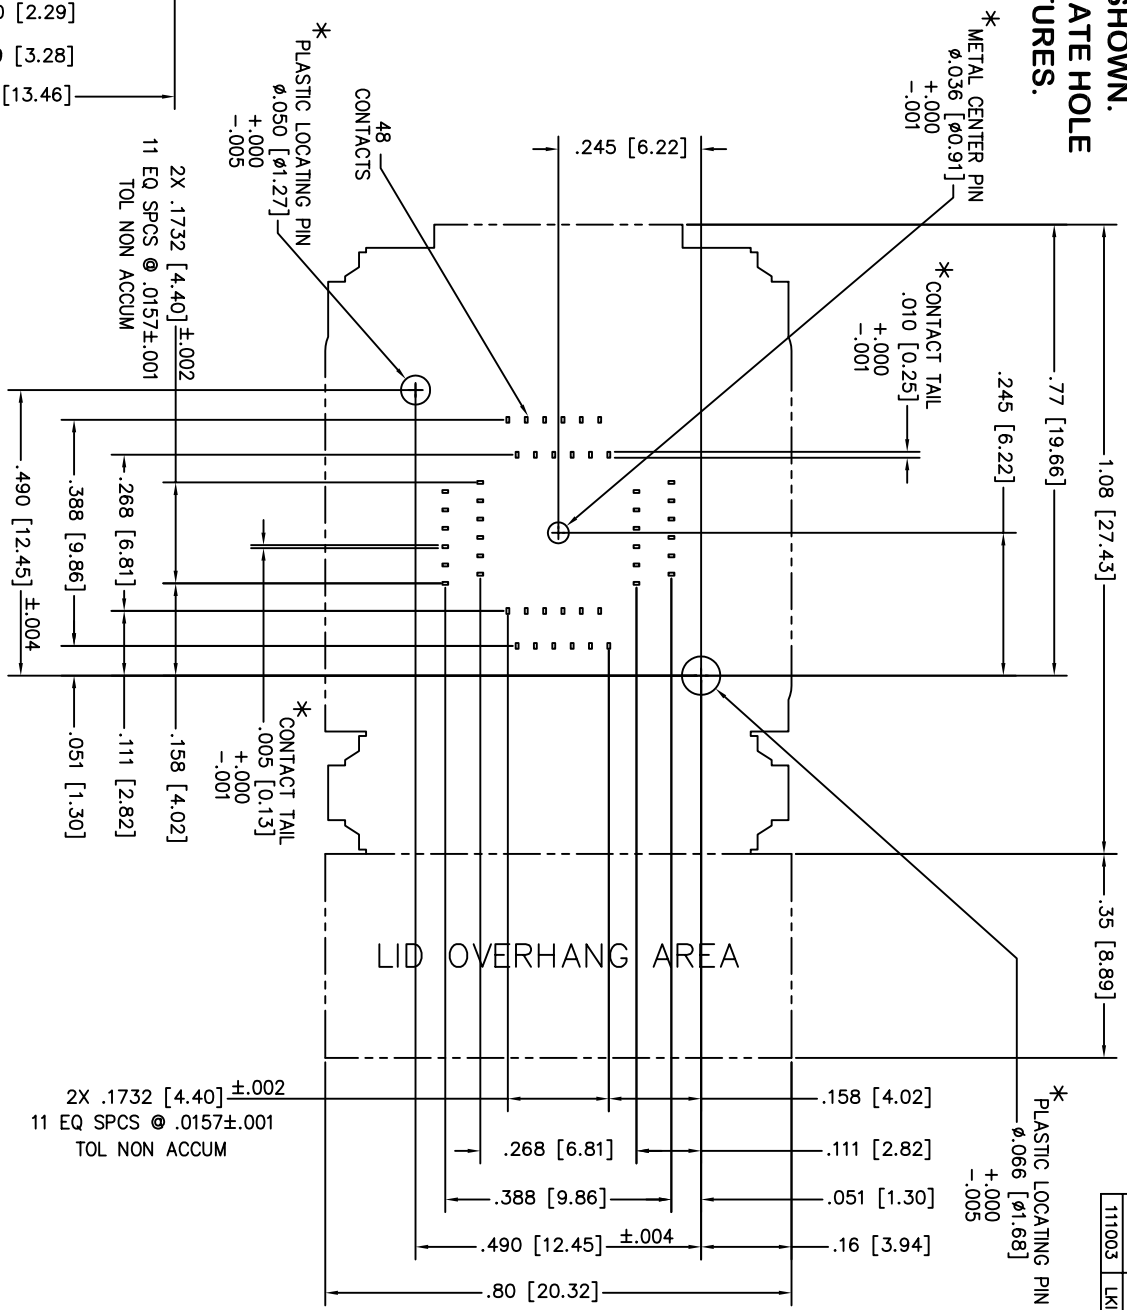

NEST SIZE AND CONTACT POSITIONS SHOWN;
NON-FUNCTIONAL SURFACES FOR REPRESENTATION ONLY

PLUNGER IS .220 [5.59] X .232 [5.89]
FOR A .028 [0.70] - .039 [1.00] THICK DEVICE

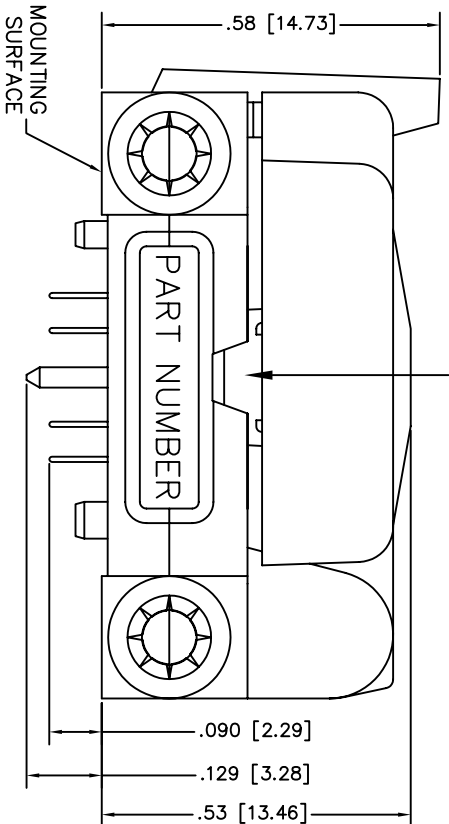

FOOTPRINT AS VIEWED FROM TOP OF SOCKET

PROPRIETARY

PART NUMBER
48QN40T16060

SIZE C DWG NO. 48QN40T16060 SH 1/1

UNLESS OTHERWISE SPECIFIED
XXX = ±.003 SURFACE
XX = ±.010
X = ±.015
ANGLE = 45°

SCALE NONE DATE
DWG LKI 111003
CHK MAA 111303
ENGR

TITLE QFN SOCKET;
6 x 6mm, 0.40mm-PITCH;
48 CONTACTS PLUS CENTER PIN;
THRU-HOLE

HOLE TOLERANCES
1.28 THRU 2.50 = +.005 - .001
2.51 THRU 5.00 = +.008 - .001
5.01 THRU 1.00 = +.010 - .001
1.001 THRU 2.00 = +.012 - .001

ALL DIM ARE IN INCHES
ALL DIM (XX) ARE MILLIMETERS
REMOVE ALL BURS AND
SHARP EDGES

ASTRONOS 2601 TEXAS DRIVE
IRVING, TX 75062

THIS DRAWING IS SUBJECT TO CHANGE WITHOUT
NOTICE. PLEASE REQUEST A CURRENT DRAWING
WHEN LAYING OUT BOARDS.

FEATURES - T
= STANDARD

DATE	INT
111003	LKI